



Nepal Electricity Authority
Distribution and Consumer Service Directorate
Lumbini Province Division Office, Nepalgunj, Banke
BILL OF QUANTITIES


Name of Project: Construction of store Room ,drain and PCC works and other miscellaneous civil works

F.Y. 2083/84

Site Location: NEA,Lumbini Province Division Office Nepalgunj

S.N.	Description of items	Unit	Quantity	Rate in Figure	Rate In words	Amount	Remarks
A	Provisional Sum						
1	Relocation of the existing utilities and infrastructure during construction and other additional work if necessary as per the instruction of engineer	PS	1	20000		20000	
B	Construction Work						
1	Dismantling of cement mortared masonry, PCC, RCC and other deleterious material of the existing drain and disposal of the material in safe disposal area as per the instruction of the engineer	cum	8.335				
2	Earthwork excavation in Hard soil/Gravels/Boulder mixed soil for drain and trenches including shoring, strutting, bracing, sheeting and disposal upto 10 m and lift upto 1.5 m	cum	9.9				
3	Providing and laying flat brick soling in sub-structure complete as per Drawing and Technical Specifications	sqm	66.75				
4	Providing , Fabricating , assembling and erecting structural steel(MS iron) components / elements including nut, bolt, gusset plate,all complete including paint as per specification and instruction of site incharge.	Kg	917.534				
5	First Class Brick Work in 1:4 c/s: Providing and Laying First Class Brickwork in 1:4 cement sand mortar in perfect lines and level, shape and plumb including setting out, soaking of bricks, scaffolding, raking of joints, curing etc. as per specifications, drawings and instructions all complete	cum	20.886				
6	Cement Concrete Work M15 (1:2:4): Providing, Laying, Compacting and Curing Cement Concrete M15 (1:2:4) work with cement, sand and crushed stone up to size of 40mm down finishing to approved level, line and dimensions using mixer machine and vibrator including formworks all complete as per drawings, specifications and instructions all complete	cum	19.118				

Authorized Signature and seal

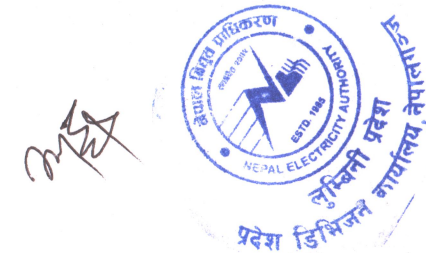



Nepal Electricity Authority
Distribution and Consumer Service Directorate
Lumbini Province Division Office, Nepalgunj, Banke

BILL OF QUANTITIES

Name of Project: Construction of store Room ,drain and PCC works and other miscellaneous civil works

Site Location: NEA,Lumbini Province Division Office Nepalgunj

F.Y. 2083/84

S.N.	Description of items	Unit	Quantity	Rate in Figure	Rate In words	Amount	Remarks
7	Reinforcement Bar (Supplying, Straightening, cleaning, cutting, bending, placing and binding of HYSD Fe 500 reinforcement) as per specification, drawing and instructions all complete	kg	809.506				
8	Supply ,Fitting and fixing of coloured cgi sheet along with ridge cover, nuts all complete as per the instruction of the engineer (heavy duty) 26 guage	sqm	89.386				
9	50mm thick PCC in (1:2:4) with cement punning(Screeding and punning works) using aggregate for flooring works including cleaning of the existing surface,removing dirt and deliterious material on surface all complete as per the instruction of the engineer	Sq.m	70.000				
10	Supply,fitting,fixing MS iron door with frame,sheet handle ,lock arrangement ,including enamel paint all complete as per the instruction of the engineer	kg	75.273				
11	12.5 mm thick plaster 1:4 c/s : Providing, Laying and Curing 12.5mm thick plaster in 1:4 cement sand mortar in wall to perfect plumb, lines and level complete as per drawings, specifications and instructions all complete	sqm	176.812				
12	Supply and Painting with two coat of Interior Emulsion Paint on single coat of primer as per the instruction of the engineer	sqm	85.620				
13	Supply and Painting with two coat of Weather Resistant Paint on single coat of primer on exterior part of building as per the instruction of the engineer	sqm	88.406				
14	Providing and Fitting U.P.V.C sliding windows frame 80/50 sliding window sash 38/62 mm, white colour,net all complete inside 1.5 mm galvanized rainforcement, 5mm clear glass	Sq.m	7.442				

Handwritten signature





Nepal Electricity Authority
Distribution and Consumer Service Directorate
Lumbini Province Division Office, Nepalgunj, Banke

BILL OF QUANTITIES

Name of Project: Construction of store Room ,drain and PCC works and other miscellaneous civil works

Site Location: NEA,Lumbini Province Division Office Nepalgunj

F.Y. 2083/84

S.N.	Description of items	Unit	Quantity	Rate in Figure	Rate In words	Amount	Remarks
15	Providing and laying 16mm thick or above granite on existing staircase and floor surface over a 20mm thick cement sand mortar (1:2) of the approved colour and quality including preparation of surface by chipping of existing surface material ,cleaning of dirt , cutting granite to required size , nosing,polishing, and consisting at least 3 parallel anti slip grooves lines in granite along tread portion of staircase all complete as per the instruction of engineer	Sq.m	45.461				
16	Providing , Fabricating , assembling and erecting MS Grill for windows with 12mm*12mm square rod 4.5mm*20mm plate for frame and all complete including paint as per specification and instruction of site incharge.	kg	148.840				
17	Supply ,fitting and fixing of 110(6kg/m2)pvc pipe for safely disposal of rain water with necessary accessories like elbow,clamp etc all complete as per the instruction of engineer	rm	25.000				
18	Electrification work for room with supply ,fitting and installation light illuminaries ,ceiling fans (2) modular switches ,power sockets with necessary wiring and all accessories all complete as per the instruction of the engineer	LS	1.000				
				Total, NRs.			
				Vat @ 13%			
				Grand Total including Vat and PS			

Name of Firm
Address
Contact Number

(Signature)